




# LUXEON Altilon Intense 1x4

Industry-leading solutions for compact high performance headlight systems

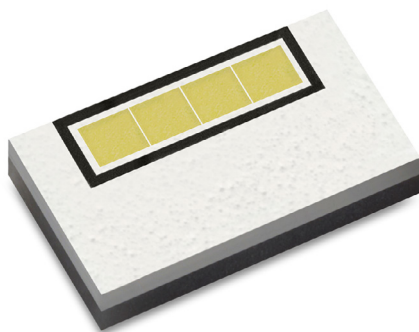

LUXEON Altilon Intense LEDs, with their miniaturized form factor, are designed to support low and high beam applications. The Lumileds automotive binning structure meets both SAE and ECE color specifications and is hot binned at 85°C, consistent with actual automotive operational environments. All LUXEON Altilon Intense LEDs are both IEC60810 and AEC-Q102 qualified.

## FEATURES AND BENEFITS

Standard packaging for low cost and ease of manufacturability

Hot binned at 85°C MP to match closer to operating conditions

IEC/PAS 62707-1 White LED

## PRIMARY APPLICATIONS

Adaptive Lighting

- ADB
- Matrix Beam

Headlight

- Low Beam
- High Beam


LUXEON Altilon Intense 1x4 Absolute Ratings.

PARAMETER	PERFORMANCE
Minimum DC Forward Current	50mA
Maximum DC Forward Current	1125mA
Maximum Junction Temperature <sup>[1]</sup>	150°C
Maximum Junction Temperature for Short Time Applications <sup>[1]</sup>	175°C
Operating Case Temperature at Test Current <sup>[1]</sup>	-40°C to 130°C
Operating Case Temperature at Maximum Current <sup>[1]</sup>	125°C
LED Storage Temperature	-40°C to 130°C
Soldering Temperature	JEDEC 020c 260°C
ESD Sensitivity <sup>[3]</sup>	±8kV HBM, ±2kV CDM, ±400V MM
Reverse Voltage (V <sub>reverse</sub> )	LUXEON LEDs are not designed to be driven in reverse bias

Notes:

1. Proper current derating must be observed to maintain junction temperature below the maximum allowable. LUXEON Altilon Intense 1x3 LEDs driven at or above maximum LED case temperature may have a shorter lifetime.
2. Short time operations of less than 200 hours.
3. Measured using human body model (per JESD22 A114), machine model (per JESD22 A115) and charged device model (per JESD22 C101).

Mechanical Dimensions.

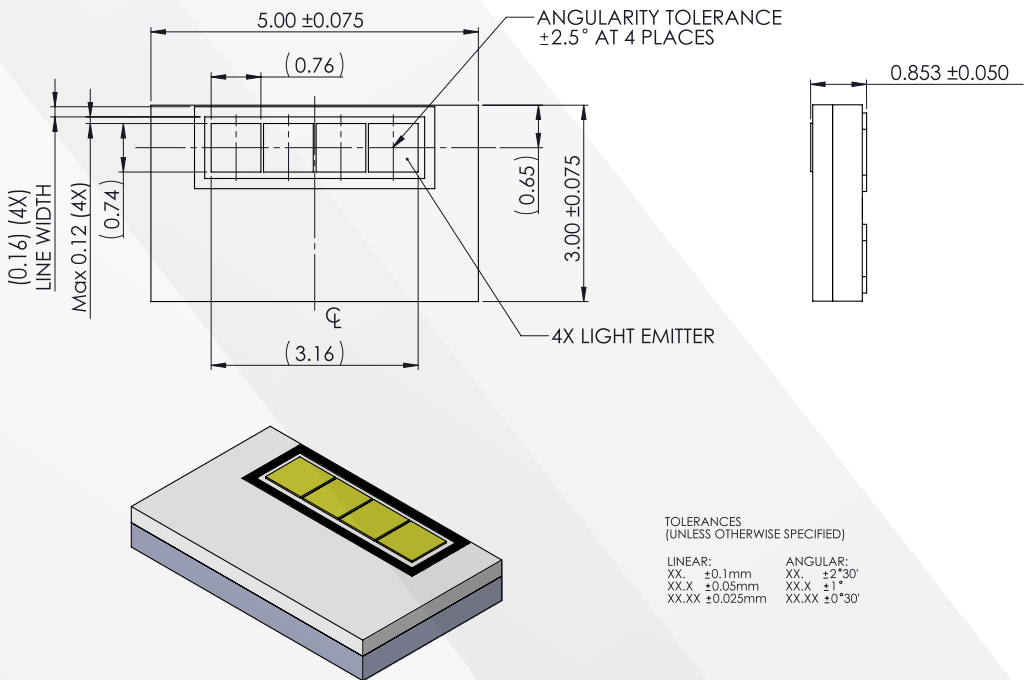

Notes:

1. Drawings are not scale.
2. All dimensions are in millimeters.