



# LUXEON XR-5050 HE

New Form-Factor Compatible with Off-the-Shelf Optics



LUXEON XR-5050 HE products are standard integrated modules compatible with off-the-shelf drivers, optics and heat sinks. They feature LUXEON 5050 HE LEDs and are constructed with MCPCB substrates for thermal efficiency and mechanical robustness, and eliminate engineering design costs, tooling costs, and material inventory costs. This versatile building-block approach simplifies system integration and accelerates time-to-market.

## FEATURES AND BENEFITS

- Efficacy and Luminous flux of up to 184lm/W typ and 8600lm available
- Available CCT/CRI combinations: 70CRI (2200K, 2700K, 3000K, 4000K, 5000K and 5700K), 80CRI (2700K, 3000K, 4000K, 5000K and 5700K) and 90CRI (5700K)
- Superior board level color control of  $\leq 3$ SDCM
- MCPCB for efficient heat dissipation and mechanical robustness
- UL 8750, ENEC, CE, UKCA compliance
- 5-year limited guarantee

## PRIMARY APPLICATIONS

- High Bay
- Low Bay
- Sport Lights
- Outdoor Area Lights


LUXEON XR-5050 HE product performance at 1050mA, Tc=85°C.

NOMINAL CCT	MINIMUM CRI <sup>(1, 2)</sup>	LUMINOUS FLUX <sup>(1)</sup> (lm)		TYPICAL LUMINOUS EFFICACY (lm/W)	ENERGY EFFICIENCY CLASS <sup>(3)</sup>	PART NUMBER
		MINIMUM	TYPICAL			
2200K	70	6856	7272	155	E	L225-2270024MLU010
2700K	70	7618	8042	171	D	L225-2770024MLU010
3000K	70	7923	8328	177	D	L225-3070024MLU010
4000K	70	8317	8636	184	C	L225-4070024MLU010
5000K	70	8317	8636	184	C	L225-5070024MLU010
5700K	70	8121	8442	179	D	L225-5770024MLU010
2700K	80	6733	7241	154	E	L225-2780024MLU010
3000K	80	7039	7553	161	D	L225-3080024MLU010
4000K	80	7661	8025	171	D	L225-4080024MLU010
5000K	80	7661	8025	171	D	L225-5080024MLU010
5700K	80	7578	7914	168	D	L225-5780024MLU010
5700K	90	6396	6834	145	E	L225-5790024MLU010

Notes:

1. Lumileds maintains a tolerance of ±2 on CRI and ±7% on luminous flux measurements.
2. Typical CRI is approximately 2 points higher than the minimum CRI specified, but this is not guaranteed.
3. Energy efficiency class as specified in Commission Delegated Regulation (EU) 2019/2015. The available range of energy efficiency classes is A-G.

Mechanical Dimensions.

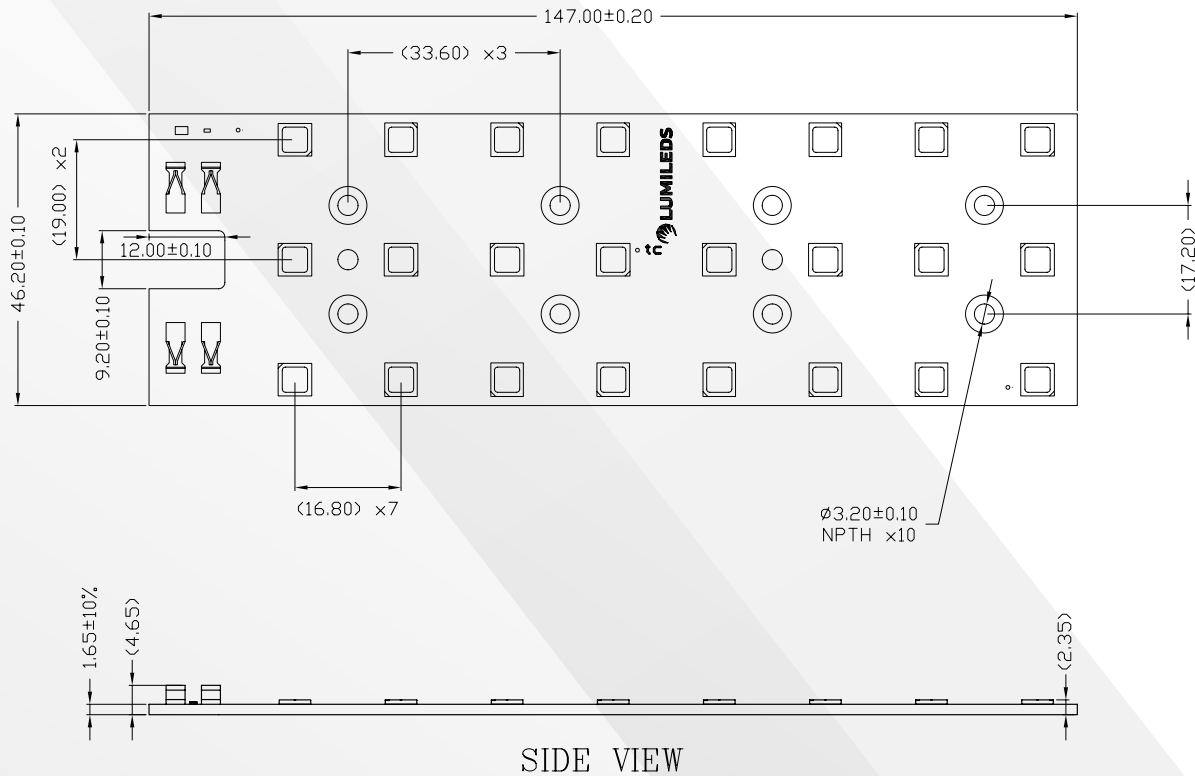

Notes:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

©2023 Lumileds Holding B.V. All rights reserved. LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.

[lumileds.com](http://lumileds.com)

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at [lumileds.com/patents](http://lumileds.com/patents).