



LUXEON 3014



High efficacy compact package, designed for high quality light output

LUXEON 3014 has a compact package size of 3.0mm x 1.4mm x 0.70mm—ideal for achieving uniform light output where space is limited, such as linear applications, tube lighting, and signage. LUXEON 3014 is hot-color targeted at a junction temperature of 65°C, ensuring color consistency and meeting ANSI standards at operating conditions.



FEATURES AND BENEFITS

Compact package design affirms uniformity and reduction in spottiness

Hot-color targeting ensures better color control

1/9th ANSI micro-color binning enables tight color control

120mA maximum driving current allows outstanding brightness

PRIMARY APPLICATIONS

- TRIMART ATTEICATIONS
Wall Grazer
Linear
Wall Wash
Sconce
Downlights



Table of Contents

General Product Information	
Product Test Conditions	
Part Number Nomenclature	
Lumen Maintenance	
Environmental Compliance	
Performance Characteristics	3
Product Selection Guide	
Optical Characteristics	
Electrical and Thermal Characteristics	4
Absolute Maximum Ratings	
Characteristic Curves	5
Spectral Power Distribution Characteristics	5
Forward Current Characteristics	
Radiation Pattern Characteristics	9
Product Bin and Labeling Definitions	10
Decoding Product Bin Labeling	10
Luminous Flux Bins	10
Color Bin Definitions	
Forward Voltage Bins	
Mechanical Dimensions	17
Reflow Soldering Guidelines	18
JEDEC Moisture Sensitivity	18
Solder Pad Design	
Packaging Information	19
Pocket Tape Dimensions	19
Reel Dimensions	20
About Lumileds	

General Product Information

Product Test Conditions

LUXEON 3014 LEDs are tested with a 20ms monopulse of 60mA at a junction temperature, $T_{j'}$ of 25°C. Forward voltage and luminous flux are binned at a T_i of 25°C, while color is hot targeted at a T_i of 65°C.

Part Number Nomenclature

Part numbers for LUXEON 3014 follow the convention below:

L 1 3 0 - A A B B C C 1 4 0 0 0 0 D

Where:

- **A A** designates nominal CCT (22=2200K, 25=2500K, 27=2700K, 30=3000K, 35=3500K, 40=4000K, 50=5000K, 57=5700K, 65=6500K, 80=8000K, 10=10000K)
- **B B** designates minimum CRI (70=70CRI, 80=80CRI, 90=90CRI, 95=95CRI)
- **C C** designates platform (HE=high efficacy)
- D designates Lumileds internal code (1 is full distribution base part; 2, 3, etc.=shares the same base part)

Therefore, the following part number is used for a LUXEON 3014 3000K 80CRI high efficacy LED:

L 1 3 0 - 3 0 8 0 H E 1 4 0 0 0 0 1

Lumen Maintenance

Please contact your local Sales Representative or Lumileds Technical Solutions Manager for more information about the long-term performance of this product.

Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON 3014 is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Performance Characteristics

Product Selection Guide

Table 1. Product performance of LUXEON 3014 at 60mA and 30mA, at specified test conditions

		LUMINOUS	FLUX [3] (lm)	TYPICAL LUMINOUS	TYPICAL LUMINOUS	TYPICAL LUMINOUS	
NOMINAL CCT ^[1]	MINIMUM - CRI [2, 3]	MINIMUM	TYPICAL	EFFICACY (Im/W)	FLUX ^[2] (lm)	EFFICACY (Im/W)	PART NUMBER
			60mA		30	mA	
8000K	70	25.0	30.4	172	16.1	190	L130-807000140000
10000K	70	23.0	29.8	168	15.8	186	L130-107000140000
2200K	80	19.0	24.9	141	13.2	155	L130-2280HE14000
2500K	80	21.0	26.8	151	14.2	167	L130-2580HE14000
2700K	80	23.0	28.0	158	14.8	175	L130-2780HE14000
3000K	80	23.0	28.9	163	15.3	180	L130-3080HE14000
3500K	80	23.0	29.9	169	15.8	187	L130-3580HE14000
4000K	80	25.0	30.4	172	16.1	190	L130-4080HE14000
5000K	80	25.0	30.9	175	16.4	193	L130-5080HE14000
5700K	80	25.0	30.5	172	16.2	190	L130-5780HE14000
6500K	80	25.0	29.8	168	15.8	186	L130-6580HE14000
2200K	90	16.0	20.3	115	10.7	126	L130-22900014000
2500K	90	16.0	22.5	127	11.9	140	L130-25900014000
2700K	90	18.0	23.2	131	12.2	144	L130-27900014000
3000K	90	19.0	24.3	137	12.8	151	L130-30900014000
3500K	90	19.0	25.4	144	13.4	158	L130-35900014000
4000K	90	20.0	26.3	149	13.9	163	L130-40900014000
5000K	90	20.0	26.2	148	13.8	163	L130-50900014000
5700K	90	20.0	26.0	147	13.7	161	L130-57900014000
6500K	90	20.0	26.0	147	13.7	161	L130-65900014000
2200K	95	15.5	20.1	114	10.7	126	L130-22950014000
2500K	95	18.0	20.7	117	11.0	130	L130-25950014000
2700K	95	18.0	20.7	117	11.0	130	L130-27950014000
3000K	95	20.0	22.6	128	12.0	142	L130-30950014000
3500K	95	20.0	23.9	135	12.7	150	L130-35950014000
4000K	95	19.5	23.9	135	12.7	150	L130-40950014000
5000K	95	19.5	23.7	134	12.6	149	L130-50950014000
5700K	95	19.5	23.7	134	12.6	148	L130-57950014000

Optical Characteristics

Table 2. Optical characteristics for LUXEON 3014 at 60mA, T = 25°C

	, ,	
PART NUMBER	TYPICAL TOTAL INCLUDED ANGLE [1]	TYPICAL VIEWING ANGLE [2]
L130-xxxxxx1400001	140°	116°

Notes for Table 1:

1. Correlated color temperature is hot targeted at T=65°C.

2. Lumileds maintains a tolerance of ±2 on CRI and ±6.5% on luminous flux measurements.

3. Typical CRI is approximately 2 points higher than the minimum CRI specified, but this is not guaranteed.

Total angle at which 90% of total luminous flux is captured.
 Viewing angle is the off axis angle from the LED centerline where the luminous intensity is ½ of the peak value.

Electrical and Thermal Characteristics

Table 3. Electrical and thermal characteristics for LUXEON 3014 at 60mA, T_i=25°C

PART NUMBER	FORWARD VOLTAGE [1] (V _f)			TYPICAL TEMPERATURE	TYPICAL THERMAL RESISTANCE—JUNCTION	
PART NUMBER	MINIMUM	TYPICAL	MAXIMUM	VOLTAGE [2] (mV/°C)	TO SOLDER PAD (°C/W)	
L130-xxxxxx1400001	2.8	2.95	3.3	-2.0 to -4.0	35	

Notes for Table 3:

- 1. Lumileds maintains a tolerance of $\pm 0.1 V$ on forward voltage measurements. 2. Measured between 25°C and 85°C.

Absolute Maximum Ratings

Table 4. Absolute maximum ratings for LUXEON 3014

PARAMETER	MAXIMUM PERFORMANCE
DC Forward Current [1,2]	120mA
Peak Pulsed Forward Current [1, 3]	150mA
LED Junction Temperature (DC & Pulse) [1]	125°C
ESD Sensitivity (ANSI/ESDA/JEDEC JS-001-2012)	Class 2
Operating Case Temperature [1]	-40°C to 105°C
LED Storage Temperature	-40°C to 100°C
Soldering Temperature	JEDEC 020D 260°C
Allowable Reflow Cycles	3
Reverse Voltage (V _{reverse}) ^[4]	-5V

Notes for Table 4:

- 1. Proper current derating must be observed to maintain the junction temperature below the maximum allowable junction temperature.

 2. Residual periodic variations due to power conversion from alternating current (AC) to direct current (DC), also called "ripple," are acceptable if the following conditions are met:

 The frequency of the ripple current is 100Hz or higher

 The average current for each cycle does not exceed the maximum allowable DC forward current

 The maximum amplitude of the ripple does not exceed 15% of the maximum allowable DC forward current

 At 10% dataset and with outlook width of 100m.
- At 10% duty cycle with pulse width of 10ms.
 At a maximum reverse current of 2μA. LUXEON 3014 LEDs are not designed to be driven in reverse bias.

Characteristic Curves

Spectral Power Distribution Characteristics

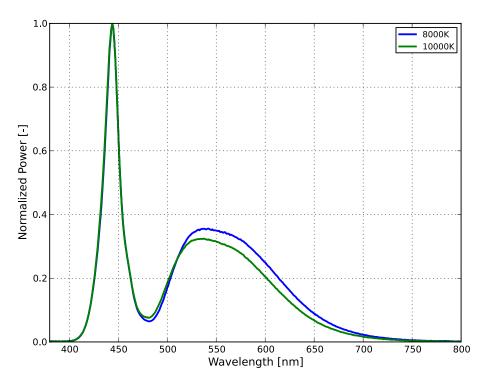


Figure 1a. Typical normalized power vs. wavelength for L130-xx70001400001 at 60mA, T_i=25°C

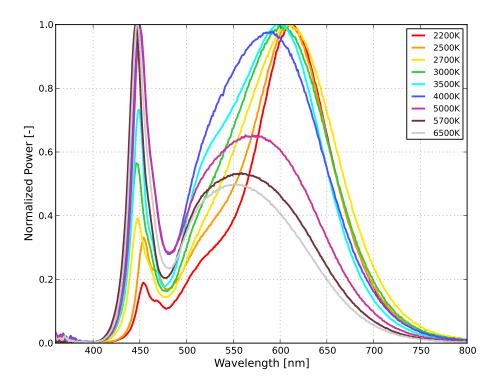


Figure 1b. Typical normalized power vs. wavelength for L130-xx80HE1400001 at 60mA, T_i=25°C

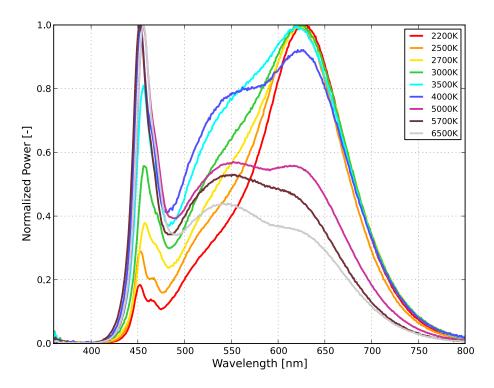


Figure 1c. Typical normalized power vs. wavelength for L130-xx90001400001 at 60mA, T_j =25°C

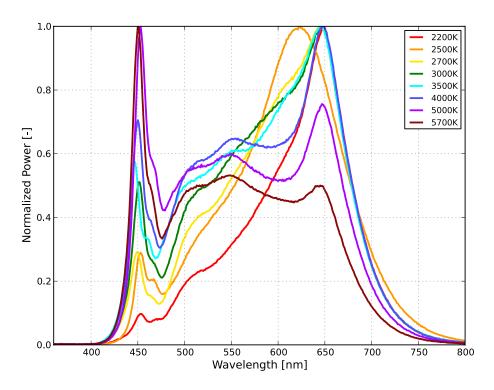


Figure 1d. Typical normalized power vs. wavelength for L130-xx95001400001 at 60mA, T_i =25°C

Light Output Characteristics

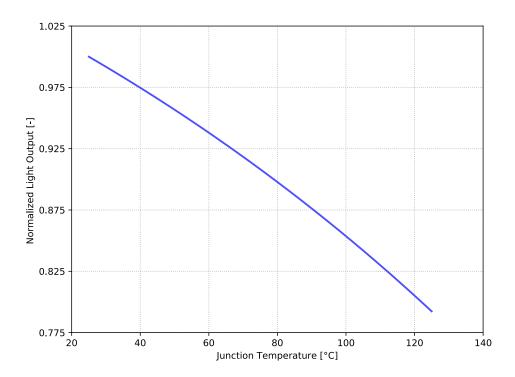


Figure 2. Typical normalized light output vs. junction temperature for L130-xxxxxx1400001 at 60mA

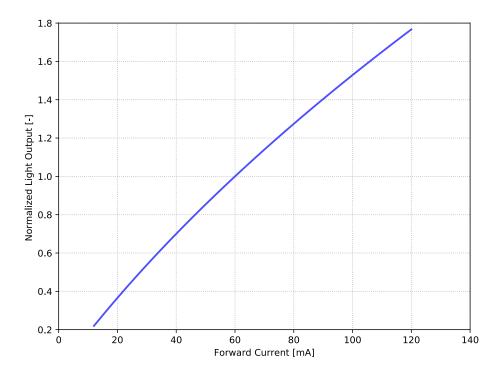


Figure 3. Typical normalized light output vs. forward current for L130-xxxxxx1400001 at T_i=25°C

Forward Current Characteristics

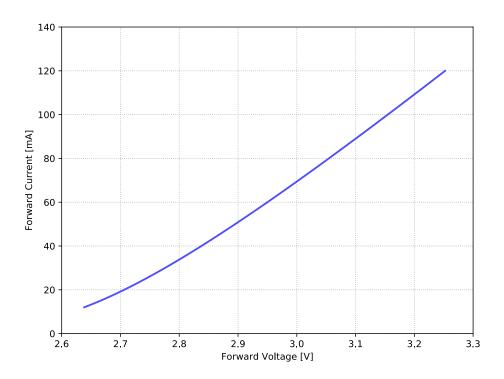


Figure 4. Typical forward current vs. forward voltage for L130-xxxxxx1400001 at T_i=25°C

Radiation Pattern Characteristics

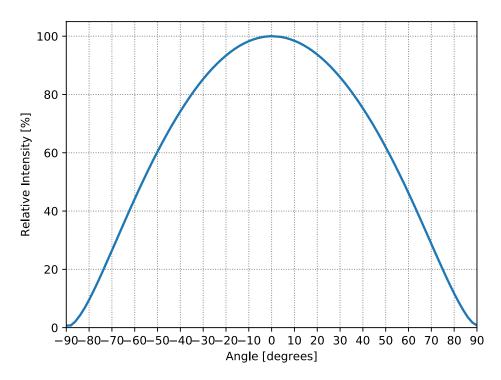


Figure 5. Typical radiation pattern for L130-xxxxxx1400001 at 60mA, T_i=25°C

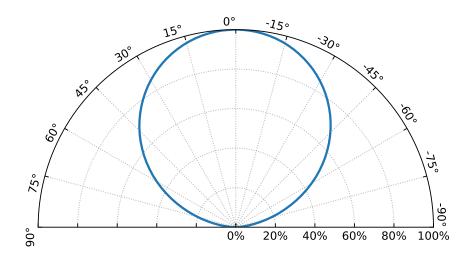


Figure 6. Typical polar radiation pattern for L130-xxxxxx1400001 at 60mA, T_j =25°C

Product Bin and Labeling Definitions

Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheet. For this reason, Lumileds bins LED components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

LUXEON 3014 LEDs are labeled using a 5-digit alphanumeric CAT code following the format below:

AxBCD

A x - designates luminous flux bin (example: G0=19 to 21 lm, J1=25 to 27 lm)

B C - designates color bin (example: 7D, 7E, 7F, 7G, 7H, 7J, 7K, 7L, 7M for 3000K parts)

designates forward voltage bin (example: T=2.80 to 2.90V, W=3.00 to 3.10V)

Therefore, a LUXEON 3014 with a lumen range of 25 to 27 lm, color bin of 7D and a forward voltage range of 2.80 to 2.90V has the following CAT code:

J 1 7 D T

Luminous Flux Bins

Table 5 lists the standard luminous flux bins for LUXEON 3014 emitters. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 5. Luminous flux bin definitions for LUXEON 3014 at 60mA, T_i=25°C

DIAL	LUMINOUS	FLUX ^[1] (lm)
BIN	MINIMUM	MAXIMUM
D0	13	15
EO	15	17
FO	17	19
G0	19	21
H1	21	23
H2	23	25
J1	25	27
	27	29
K1	29	31
K2	31	33

Notes for Table 5:

^{1.} Lumileds maintains a tolerance of $\pm 6.5\%$ on luminous flux measurements.

Color Bin Definitions

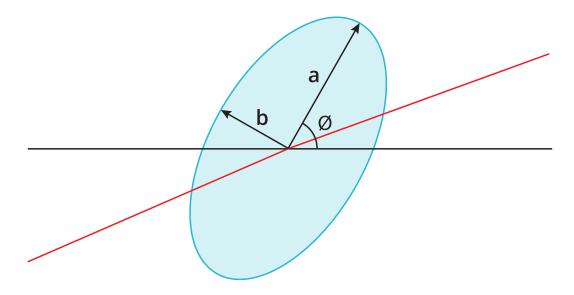


Figure 7. 3-, 4- and 5-step MacAdam ellipse illustration for Tables 6a-6k

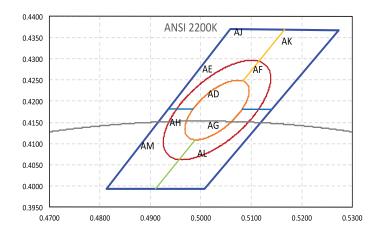


Figure 8a. Color bin structure for LUXEON 3014 2200K, hot-color targeted at T_i=65°C

Table 6a. 3- and 5-step MacAdam ellipse color bin definitions for L130-22xxHE1400001 at 60mA, hot-color targeted at T_j =65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
2200K	Single 3-step MacAdam ellipse	(0.5037, 0.4142)	0.0072	0.0042	51.0°
2200K	Single 5-step MacAdam ellipse	(0.5037, 0.4142)	0.0120	0.0070	51.0°

Notes for Table 6a: 1. Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.

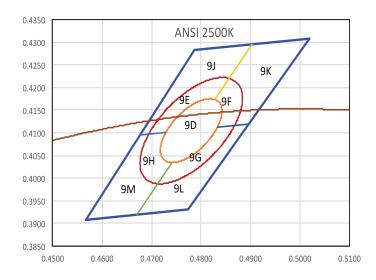


Figure 8b. Color bin structure for LUXEON 3014 2500K, hot-color targeted at T_i=65°C

Table 6b. 3- and 5-step MacAdam ellipse color bin definitions for L130-25xxHE1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
2500K	Single 3-step MacAdam ellipse	(0.4753, 0.4127)	0.0075	0.0042	53.0°
2500K	Single 5-step MacAdam ellipse	(0.4753, 0.4127)	0.0125	0.0070	53.0°

Notes for Table 6b:

Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.

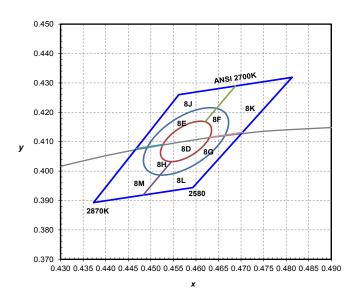


Figure 8c. Color bin structure for LUXEON 3014 2700K, hot-color targeted at T_i=65°C

Table 6c. 3- and 5-step MacAdam ellipse color bin definitions for L130-27xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
2700K	Single 3-step MacAdam ellipse	(0.4578, 0.4101)	0.00810	0.00420	53.70°
2700K	Single 5-step MacAdam ellipse	(0.4578, 0.4101)	0.01350	0.00700	53.70°

Notes for Table 6c: 1. Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.




Figure 8d. Color bin structure for LUXEON 3014 3000K, hot-color targeted at T_i=65°C

Table 6d. 3- and 5-step MacAdam ellipse color bin definitions for L130-30xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
3000K	Single 3-step MacAdam ellipse	(0.4338, 0.4030)	0.00834	0.00408	53.22°
3000K	Single 5-step MacAdam ellipse	(0.4338, 0.4030)	0.01390	0.00680	53.22°

Notes for Table 6d:

^{1.} Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.

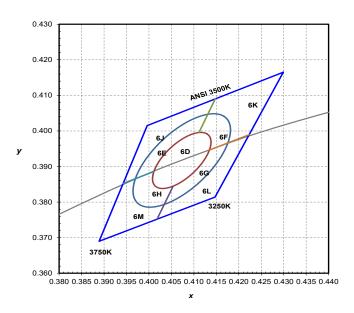


Figure 8e. Color bin structure for LUXEON 3014 3500K, hot-color targeted at T_i=65°C

Table 6e. 3- and 5-step MacAdam ellipse color bin definitions for L130-35xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
3500K	Single 3-step MacAdam ellipse	(0.4073, 0.3917)	0.00927	0.00414	54.00°
3500K	Single 5-step MacAdam ellipse	(0.4073, 0.3917)	0.01545	0.00690	54.00°

Notes for Table 6e: 1. Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.




Figure 8f. Color bin structure for LUXEON 3014 4000K, hot-color targeted at T_i=65°C

Table 6f. 3- and 5-step MacAdam ellipse color bin definitions for L130-40xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
4000K	Single 3-step MacAdam ellipse	(0.3818, 0.3797)	0.00939	0.00402	53.72°
4000K	Single 5-step MacAdam ellipse	(0.3818, 0.3797)	0.01565	0.00670	53.72°

Notes for Table 6f:

^{1.} Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.

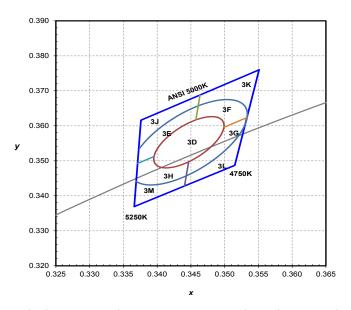


Figure 8g. Color bin structure for LUXEON 3014 5000K, hot-color targeted at T_i =65°C

Table 6g. 3- and 5-step MacAdam ellipse color bin definitions for L130-50xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

	· · · · · · · · · · · · · · · · · · ·				J
NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
5000K	Single 3-step MacAdam ellipse	(0.3447, 0.3553)	0.00822	0.00354	59.62°
5000K	Single 5-step MacAdam ellipse	(0.3447, 0.3553)	0.01370	0.00590	59.62°

Notes for Table 6g:

^{1.} Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.

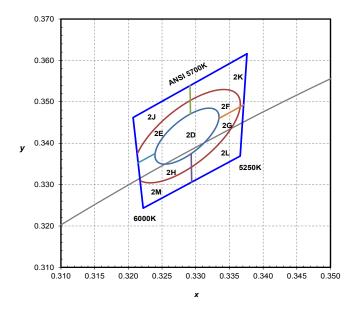


Figure 8h. Color bin structure for LUXEON 3014 5700K, hot-color targeted at T_i=65°C

Table 6h. 3- and 5-step MacAdam ellipse color bin definitions for L130-57xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
5700K	Single 3-step MacAdam ellipse	(0.3287, 0.3417)	0.00746	0.00320	59.09°
5700K	Single 5-step MacAdam ellipse	(0.3287, 0.3417)	0.01243	0.00533	59.09°

Notes for Table 6h:

^{1.} Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.




Figure 8i. Color bin structure for LUXEON 3014 6500K, hot-color targeted at T_i=65°C

Table 6i. 3- and 5-step MacAdam ellipse color bin definitions for L130-65xxxx1400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
6500K	Single 3-step MacAdam ellipse	(0.3123, 0.3282)	0.00669	0.00285	58.57°
6500K	Single 5-step MacAdam ellipse	(0.3123, 0.3282)	0.01115	0.00475	58.57°

Notes for Table 6i:

^{1.} Lumileds maintains a tolerance of ± 0.005 on x and y coordinates in the CIE 1931 color space.




Figure 8j. Color bin structure for LUXEON 3014 8000K, hot-color targeted at T_i=65°C

Table 6j. 4-step MacAdam ellipse color bin definitions for L130-8070001400001 at 60mA, hot-color targeted at T,=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
8000K	Single 4-step MacAdam ellipse	(0.2966, 0.3126)	0.00844	0.00334	58.64°




Figure 8k. Color bin structure for LUXEON 3014 10000K, hot-color targeted at T_i=65°C

Table 6k. 4-step MacAdam ellipse color bin definitions for L130-1070001400001 at 60mA, hot-color targeted at T_i=65°C

NOMINAL CCT	COLOR SPACE	CENTER POINT (cx, cy)	MAJOR AXIS, a	MINOR AXIS, b	ELLIPSE ROTATION ANGLE, θ
10000K	Single 4-step MacAdam ellipse	(0.2720, 0.2860)	0.00877	0.00332	63.28°

Notes for Table 6j:

1. Lumileds maintains a tolerance of ±0.005 on x and y coordinates in the CIE 1931 color space.

Notes for Table 6k:

1. Lumileds maintains a tolerance of ±0.005 on x and y coordinates in the CIE 1931 color space.

Forward Voltage Bins

Table 7. Forward voltage bin definitions for LUXEON 3014 at 60mA, T_i=25°C

BIN	FORWARD VOLTAGE [1] (V _f)		
DIIV	MINIMUM	MAXIMUM	
Т	2.80	2.90	
V	2.90	3.00	
W	3.00	3.10	
X	3.10	3.20	
Υ	3.20	3.30	
Z	3.30	3.40	

Notes for Table 7:

Mechanical Dimensions

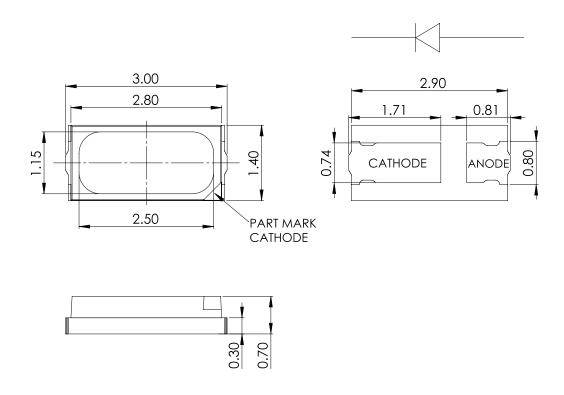


Figure 9. Mechanical dimensions for LUXEON 3014

- Notes for Figure 9:
 1. Drawings are not to scale.
 2. All dimensions are in millimeters.

^{1.} Lumileds maintains a tolerance of $\pm 0.1 \text{V}$ on forward voltage measurements.

Reflow Soldering Guidelines

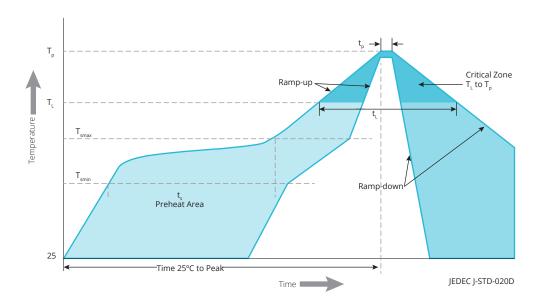


Figure 10. Visualization of the acceptable reflow temperature profile as specified in Table 8

Table 8. Reflow profile characteristics for LUXEON 3014

PROFILE FEATURE	LEAD-FREE ASSEMBLY
Preheat Minimum Temperature (T _{smin})	150°C
Preheat Maximum Temperature (T _{smax})	200°C
Preheat Time (t _{smin} to t _{smax})	60 to 120 seconds
Ramp-Up Rate (T_L to T_p)	3°C / second maximum
Liquidous Temperature (T _L)	217°C
Time Maintained Above Temperature $T_L(t_L)$	60 to 150 seconds
Peak / Classification Temperature (T _p)	260°C
Time Within 5°C of Actual Peak Temperature (t _p)	20 to 40 seconds
Ramp-Down Rate $(T_p \text{ to } T_L)$	6°C / second maximum
Time 25°C to Peak Temperature	8 minutes maximum

JEDEC Moisture Sensitivity

Table 9. Moisture sensitivity levels for LUXEON 3014

LEVEL	FLOO	FLOOR LIFE SOAK REQUIREMENTS STANDA		
LEVEL	TIME	CONDITIONS	TIME	CONDITIONS
3	168 Hours	≤30°C / 60% RH	192 Hours +5 / -0	30°C / 60% RH

Solder Pad Design

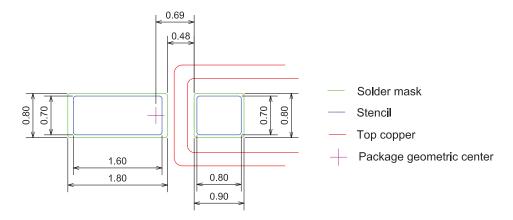


Figure 11. Recommended PCB solder pad layout for LUXEON 3014

- Notes for Figure 11:
 1. Drawings are not to scale.
 2. All dimensions are in millimeters.

Packaging Information

Pocket Tape Dimensions

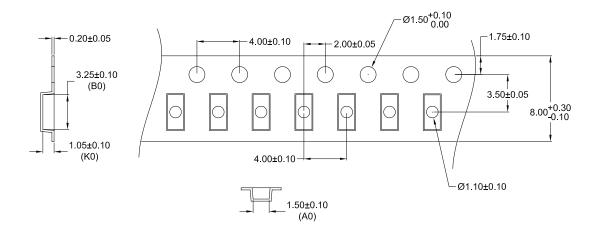


Figure 12. Pocket tape dimensions for LUXEON 3014

- Notes for Figure 12:
 1. Drawings are not to scale.
 2. All dimensions are in millimeters.

Reel Dimensions

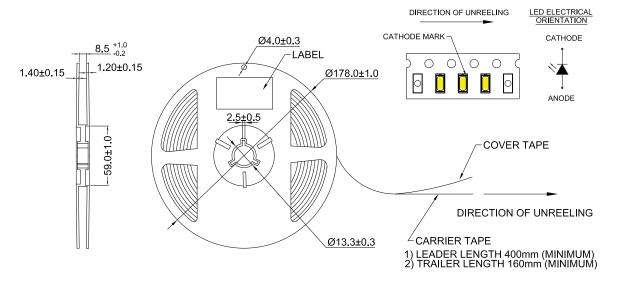


Figure 13. Reel dimensions for LUXEON 3014

- Notes for Figure 13:
 1. Drawings are not to scale.
 2. All dimensions are in millimeters.

About Lumileds

Companies developing automotive, mobile, IoT and illumination lighting applications need a partner who can collaborate with them to push the boundaries of light. With over 100 years of inventions and industry firsts, Lumileds is a global lighting solutions company that helps customers around the world deliver differentiated solutions to gain and maintain a competitive edge. As the inventor of Xenon technology, a pioneer in halogen lighting and the leader in high performance LEDs, Lumileds builds innovation, quality and reliability into its technology, products and every customer engagement. Together with its customers, Lumileds is making the world better, safer, more beautiful—with light.

To learn more about our lighting solutions, visit lumileds.com.



©2025 Lumileds Holding B.V. All rights reserved. LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries. Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.

lumileds.com