

LUXEON Versat 3030 ST 700

Brightest, lambertian flat top emitter

LUXEON Versat 3030 ST 700 is developed to enable maximum hot lumen on standard FR4 boards. It has lower thermal resistance than competitive packages in the market. It comes in an industry standard 3030 SMD package to provide easy handling and optimum protection of the die. All LUXEON Versat 3030 ST are AEC-Q102 qualified

LUXEON Versat 3030 ST 700 is available in the following color wavelengths:

- Red Orange (615 nm)
- Red (623 nm)
- Long Red (630 nm)
- Super Red (635 nm)



FEATURES AND BENEFITS

Low thermal resistance and power consumption results in simplified thermal management and system cost

Lambertian flat top emitter

High flux output provides flexibility in styling and optical design

Higher drive current capability for increased flux performance



PRIMARY APPLICATIONS

Rear Fog

Stop/Tail

Table of Contents

General Product Information	2
Product Test Conditions	2
Part Number Nomenclature	2
Environmental Compliance	2
Performance Characteristics	3
Product Selection Guide	3
Optical Characteristics	3
Electrical and Thermal Characteristics	3
Absolute Ratings	4
JEDEC Moisture Sensitivity	4
Characteristic Curves	5
Spectral Power Distribution Characteristics	5
Light Output Characteristics	6
Forward Current and Voltage Characteristics	7
Radiation Pattern Characteristics	8
Operating Limits Characteristics	8
Product Bin and Labeling Definitions	9
Designing with LUXEON Versat 3030 ST 700	9
Decoding Product Bin Labeling	9
Luminous Flux Bins	10
Color Codes	11
Forward Voltage Bins	11
Mechanical Dimensions	12
Packaging Information	13
Pocket Tape Dimensions	13
Reel Dimensions	13
Product Labeling	14

General Product Information

Product Test Conditions

LUXEON Versat 3030 ST 700 LEDs are tested and binned using a 20 ms monopulse (MP) at 700 mA drive current, case temperature, T_c of 25 °C.

Part Number Nomenclature

Part numbers for LUXEON Versat 3030 ST 700 follow the convention below:

A 1 V C – **A B C D E F G H J K M N P**

Where:

- A – designates product segment (A = Automotive)
- 1 – designates product level (1 = Level 1)
- V – designates product line/family (V = LUXEON Versat)
- C – designates package size (C = 3030)
- A B C D** – designates color variant (O612 = 612 nm minimum)
- E** – designates binning current (C = 700 mA)
- F** – designates binning configuration (1 = single binning)
- G** – open space (0 = Gen3E, A = Gen4, etc.)
- H** – designates minimum luminous flux (refer to luminous flux bins)
- J** – designates maximum luminous flux (refer to luminous flux bins)
- K** – designates minimum forward voltage (refer to forward voltage bins)
- M** – designates maximum forward voltage (refer to forward voltage bins)
- N P** – reserved for custom part numbers (00 = standard part)

Therefore, the following part number is used for a LUXEON Versat 3030 ST 700 Red-Orange with 612 nm minimum wavelength, a luminous flux range of 130 lumens to 224 lumens, and a forward voltage range of 2.00 volts to 2.80 volts:

A 1 V C – **O 6 1 2 C 1 0 N R A E 0 0**

Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON Versat 3030 ST 700 is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Performance Characteristics

Product Selection Guide

Table 1. Product selection for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

COLOR	DOMINANT WAVELENGTH ^[1,2] (nm)	PART NUMBER
Red Orange	615	A1VC-O612C10
Red	623	A1VC-R620C10
Long Red	630	A1VC-S627C10
Super Red	635	A1VC-S632C10

Notes for Table 1:

1. Dominant wavelength is derived from the CIE 1931 Chromaticity diagram and represents perceived color.
2. Lumileds maintains a tolerance of $\pm 0.5\text{nm}$ for dominant wavelength measurements.

Optical Characteristics

Table 2. Typical optical characteristics for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

PART NUMBER	TYPICAL TOTAL INCLUDED ANGLE ^[1] $\theta_{0.90\text{V}}$	TYPICAL VIEWING ANGLE ^[2] $2\theta_{1/2}$
A1VC-xxxxC10xxxxxx	138°	120°

Notes for Table 2:

1. Total angle at which 90% of total luminous flux is captured.
2. Viewing angle is the off axis angle from the LED centerline where the luminous intensity is $\frac{1}{2}$ of the peak value.

Electrical and Thermal Characteristics

Table 3. Typical electrical and thermal characteristics for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA $T_j = 25\text{ }^\circ\text{C}$

PART NUMBER	FORWARD VOLTAGE ^[1] (V)		THERMAL RESISTANCE— JUNCTION TO CASE ($^\circ\text{C}/\text{W}$)			
			$R_{\theta_{j-c}\text{el}}$ ^[2]		$R_{\theta_{j-c}\text{real}}$ ^[3]	
	MINIMUM	MAXIMUM	TYPICAL	MAXIMUM ^[4]	TYPICAL	MAXIMUM ^[4]
A1VC-xxxxC10xxxxxx	2.00	2.80	5.35	6.07	10.2	11.6

Notes for Table 3:

1. Lumileds maintains a tolerance of $\pm 0.06\text{V}$ on forward voltage measurements.
2. $R_{\theta_{j-c}\text{elect}}$: Electrical thermal resistance (junction to case).
3. $R_{\theta_{j-c}\text{real}}$: Real thermal resistance (junction to case) with wall plug efficiency included. Reference JESD51-51, JESD51-14, 4.1.3.
4. The Max Rth values are calculated (3σ).

Absolute Ratings

Table 4. Absolute ratings for LUXEON Versat 3030 ST 700

PARAMETER	PERFORMANCE
Minimum DC Forward Current	20 mA
Maximum DC Forward Current	1000 mA
Maximum Junction Temperature ^[1]	150°C
Operating Case Temperature at Test Current ^[1]	-40 to 135 °C
LED Storage Temperature	-40 to 135 °C
Soldering Temperature	JEDEC 020E 260 °C
Allowable Reflow Cycles	3
ESD Sensitivity ^[2]	±8 kV HBM ±2 kV CDM
Reverse Voltage ($V_{reverse}$) ^[3]	-15 V

Notes for Table 4:

1. Proper current derating must be observed to maintain junction temperature below the maximum, so that the LED is maintained below the maximum rated operating case temperature. LUXEON Versat 3030 ST 700 LEDs driven at or above the maximum rated operating case temperature may have shorter lifetime.
2. Measured using human body model (per ANSI/ESDA/JEDEC JS-001-2010) and charged device model (per JESD22-C101F).
3. LUXEON Versat 3030 ST is not designed to be driven in reverse bias.

JEDEC Moisture Sensitivity

Table 5a. Moisture sensitivity levels for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA

LEVEL	FLOOR LIFE		STANDARD SOAK REQUIREMENTS	
	TIME	CONDITIONS	TIME	CONDITIONS
2	1 Year	≤30°C / 60 % RH	168 Hours +5 / -0	85 °C / 60 % RH

Characteristic Curves

Spectral Power Distribution Characteristics

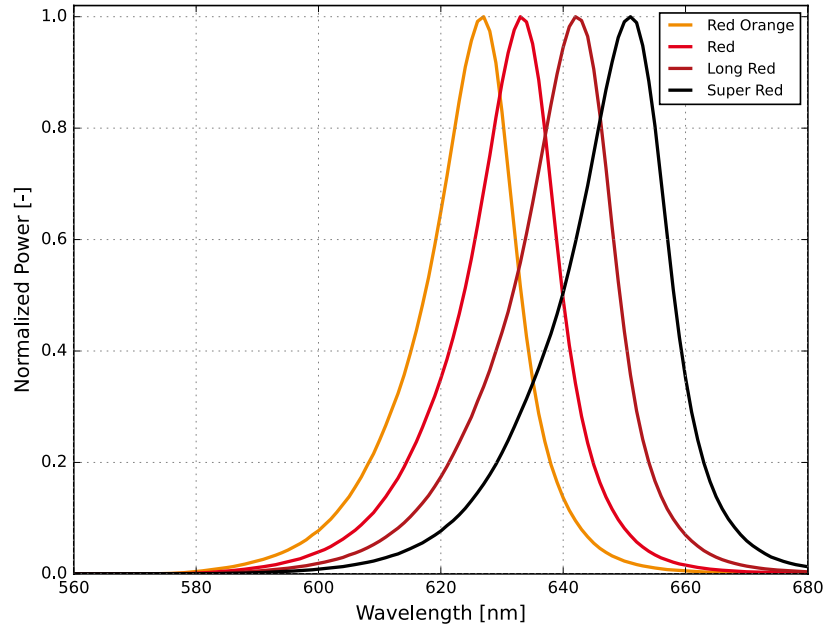


Figure 1. Typical normalized power vs. wavelength for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

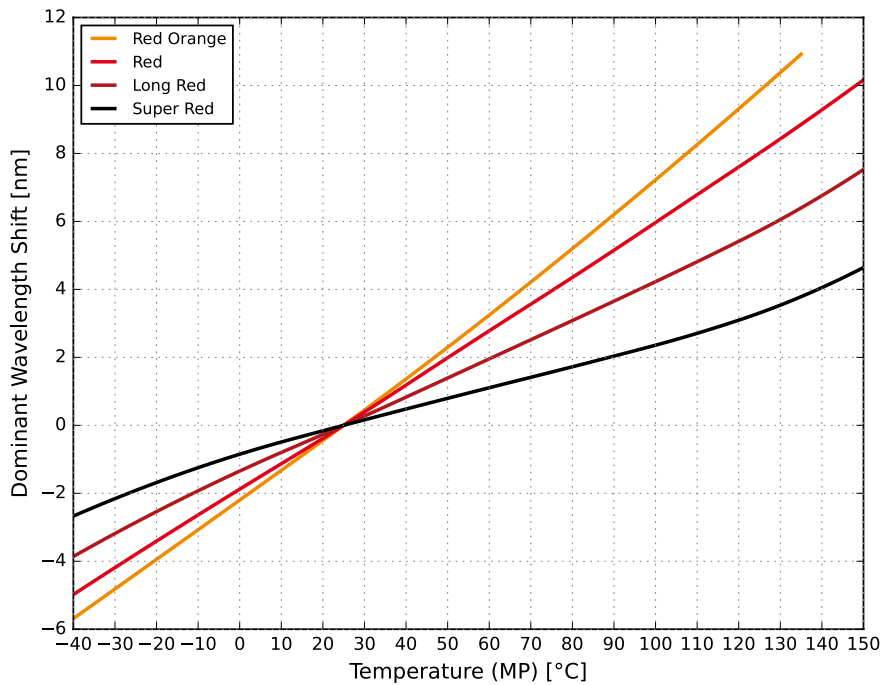


Figure 2. Typical wavelength shift vs. junction temperature for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA

Light Output Characteristics

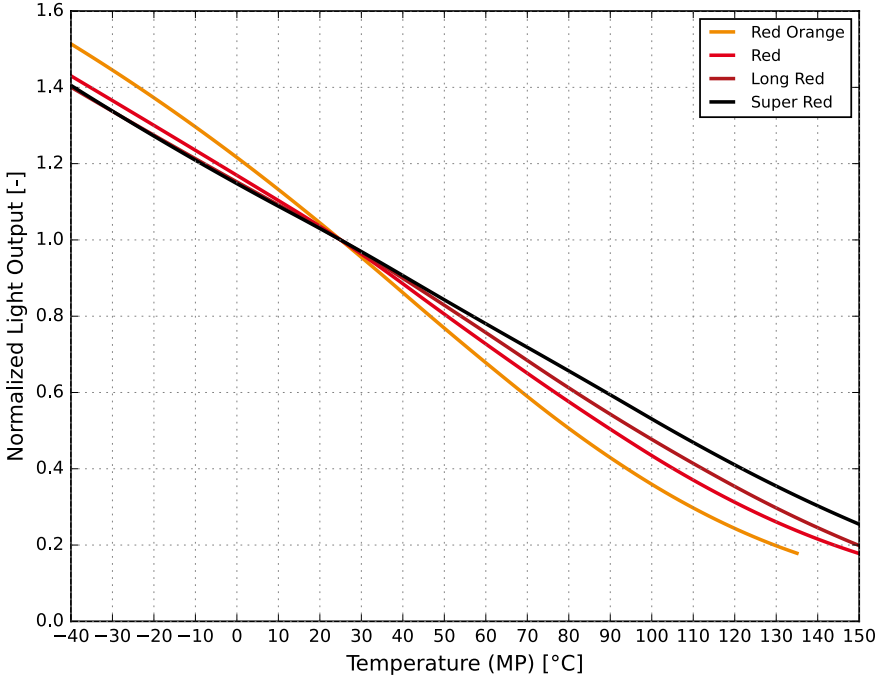


Figure 3. Typical normalized light output vs. junction temperature for LUXEON Versat 3030 ST 700 20 ms MP, 700 mA

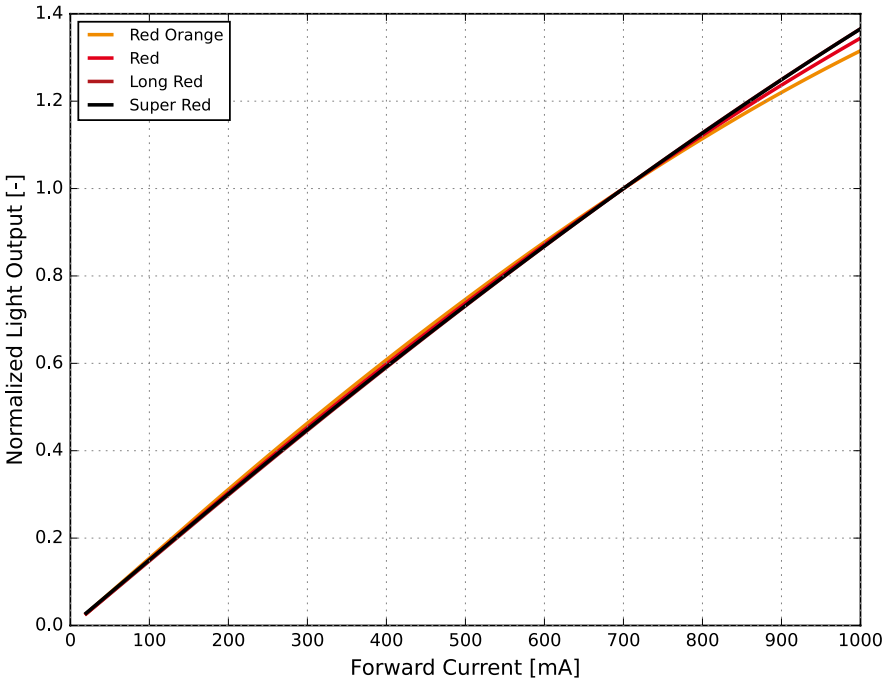


Figure 4. Typical normalized light output vs. forward current for LUXEON Versat 3030 ST 700 at $T_j = 25\text{ °C}$

Forward Current and Voltage Characteristics

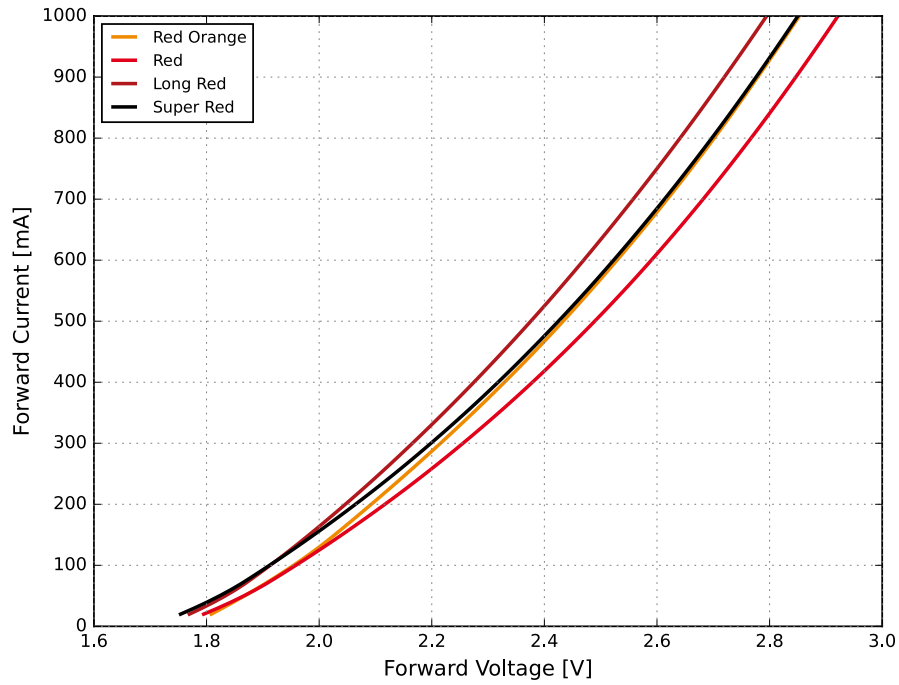


Figure 5. Typical forward current vs. forward voltage for LUXEON Versat 3030 ST 700 at $T_j = 25\text{ }^\circ\text{C}$

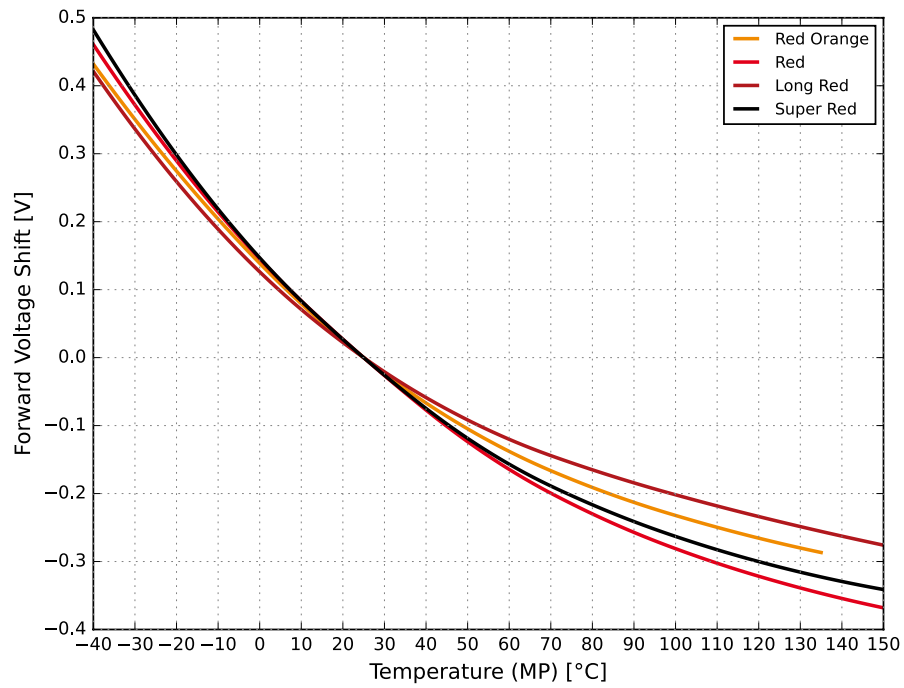


Figure 6. Typical forward voltage shift vs. junction temperature for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA

Radiation Pattern Characteristics

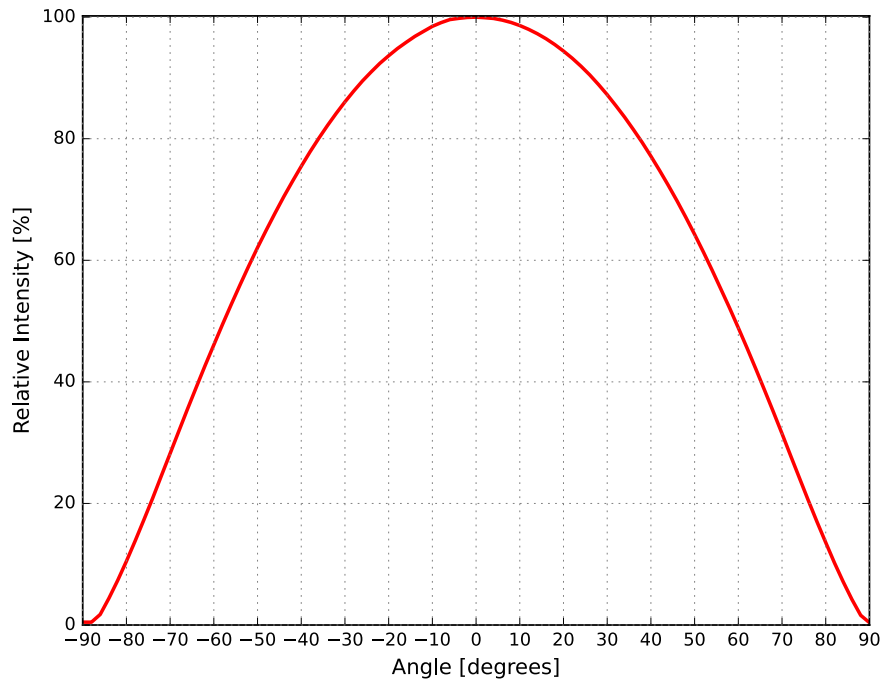


Figure 7. Typical radiation pattern for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA

Operating Limits Characteristics

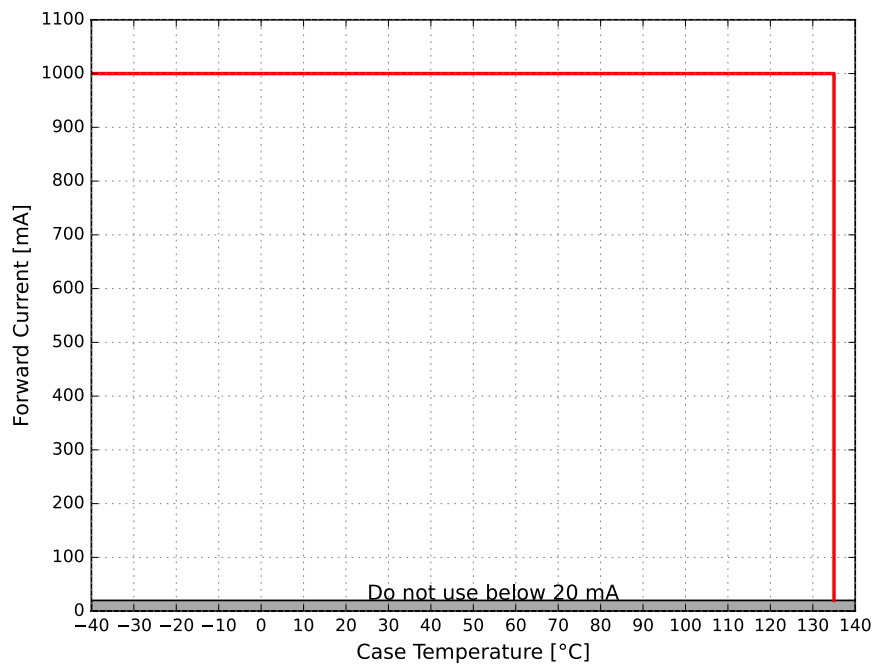


Figure 8: Maximum forward current vs. case temperature for LUXEON Versat 3030 ST 700

Product Bin and Labeling Definitions

Designing with LUXEON Versat 3030 ST 700

Flux bins supportable for car programs depend on product color and program start-of-production and end-of-production dates. Flux roadmaps by year and product color are maintained and available from the sales representative. Please contact a local sales representative to request the flux bin range with best supportability for program timing.

Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheets. For this reason, Lumileds bins the LED components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

LUXEON Versat 3030 ST 700 LEDs are labeled using 3-digit (default) or 4-digit alphanumeric CAT code following the format below:

A B C (default) OR **A A B C** (split flux bin)

Where:

- A / A A** – designates luminous flux bin (example: N = 130 lumens to 156 lumens)
- B** – designates color code (example: 3 = 612 nm to 620 nm)
- E** – designates forward voltage bin (example: D = 2.45 V to 2.60 V)

Therefore, a LUXEON Versat 3030 700 ST with a lumen range of 130 to 156, color code of 3, forward voltage of 2.45 to 2.60 and a low current forward voltage of has the following CAT code:

N 3 D

A LUXEON Versat 3030 ST 700 with a lumen range of 130 to 141, color code of 3 and a forward voltage of 2.45 to 2.60 has the following CAT code:

N 1 3 D

Luminous Flux Bins

Table 6a lists the standard luminous flux bins for LUXEON Versat 3030 ST 700 emitters. Product availability in a particular bin varies by color and platform start-of-production date. Contact your local sales representative for best supportability of programs.

Table 6a. Luminous flux bin definitions for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

BIN	LUMINOUS FLUX ⁽¹⁾ (lm) at 700 mA	
	MINIMUM	MAXIMUM
J	62	75
K	75	90
L	90	107
M	107	130
N	130	156
P	156	187
R	187	224

Notes for Table 6a:

1. Lumileds maintains a tolerance of $\pm 10\%$ on luminous flux measurements.

Table 6b. Luminous split flux bin definitions for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

BIN	LUMINOUS FLUX ⁽¹⁾ (lm) at 700 mA	
	MINIMUM	MAXIMUM
J1	62	68
J2	68	75
K1	75	82
K2	82	90
L1	90	98.5
L2	98.5	107
M1	107	118
M2	118	130
N1	130	143
N2	143	156
P1	156	170
P2	170	187
R1	187	205.5
R2	205.5	224

Notes for Table 6b:

1. Lumileds offer half-bin flux options subject to review and implementation. Please consult your local sales representative for more detail.
2. Lumileds maintains a tolerance of $\pm 10\%$ on luminous flux measurements.

Color Codes

Table 7. Color code definitions for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

CODE	DOMINANT WAVELENGTH ⁽¹⁾ (nm)	
	MINIMUM	MAXIMUM
3	612	620
6	620	627
4	627	632
5	632	638

Notes for Table 7:

1. Lumileds maintains a tolerance of ± 1 nm on dominant wavelength measurements.

Forward Voltage Bins

Table 8. Forward voltage bin definitions for LUXEON Versat 3030 ST 700 at 20 ms MP, 700 mA, $T_j = 25\text{ }^\circ\text{C}$

BIN	FORWARD VOLTAGE ⁽¹⁾ (V_f)	
	MINIMUM	MAXIMUM
A	2.00	2.15
B	2.15	2.30
C	2.30	2.45
D	2.45	2.60
E	2.60	2.80

Notes for Table 8:

1. Lumileds maintains a tolerance of ± 0.06 V on forward voltage measurements.

2. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance.

Mechanical Dimensions

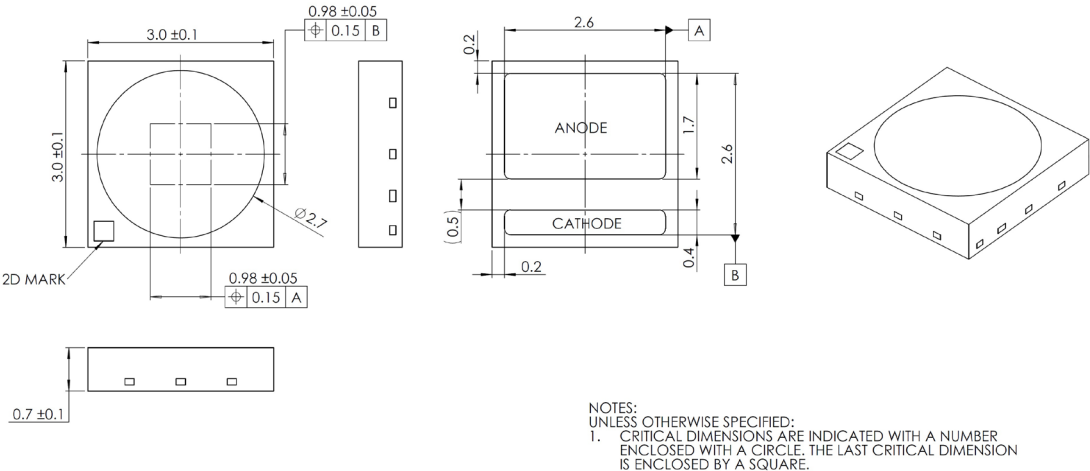


Figure 9. Mechanical dimensions for LUXEON Versat 3030 ST 700

- Notes for Figure 9:
1. Drawings are not to scale.
 2. All dimensions are in millimeters.

Packaging Information

Pocket Tape Dimensions

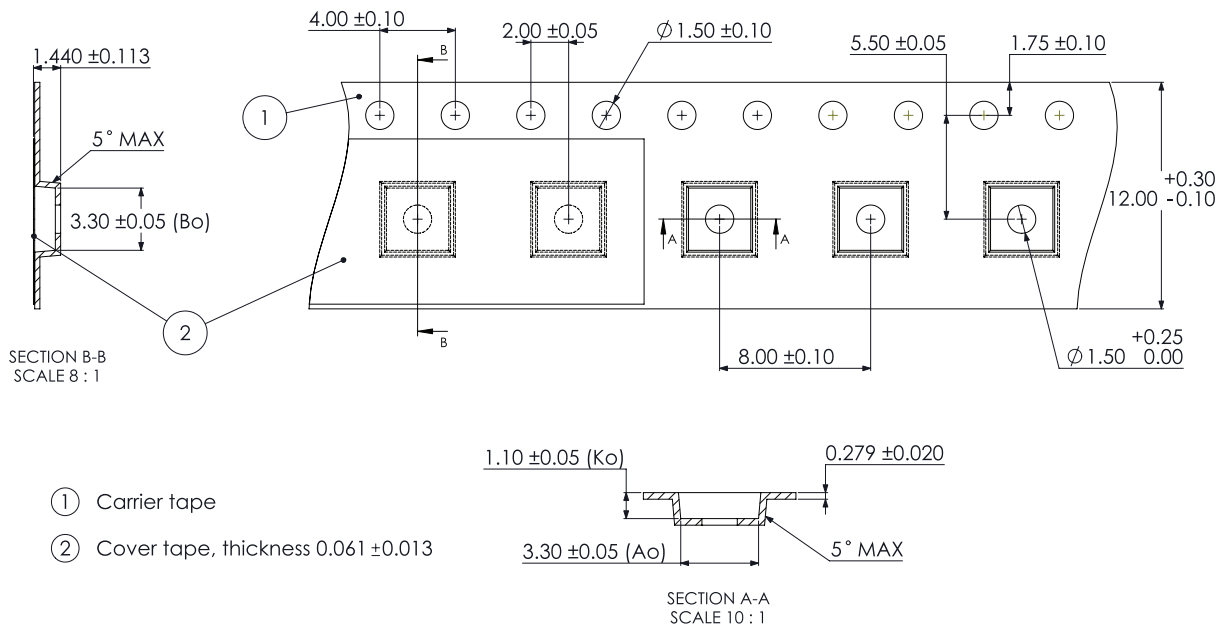


Figure 10. Pocket tape dimensions for LUXEON Versat 3030 ST 700

Notes for Figure 10:

1. Drawings are not to scale.
2. All dimensions are in millimeters.
3. Ao is the width of pocket, Ko is the depth of pocket, and Bo is the height of pocket.

Reel Dimensions

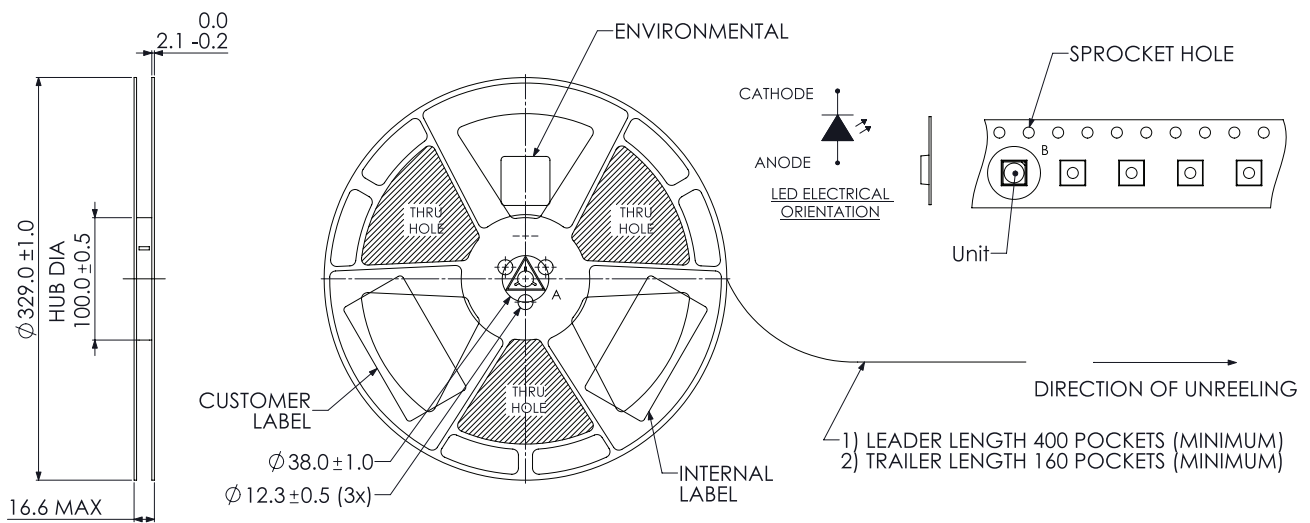


Figure 11. Reel dimensions for LUXEON Versat 3030 ST 700

Notes for Figure 11:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

Product Labeling

LUXEON Versat 3030 ST 700 LEDs are packaged in moisture barrier bags on reels. Both moisture barrier bag and reels have printed information providing part numbers with CAT codes that indicate luminous flux bin, color bins and forward voltage bins.

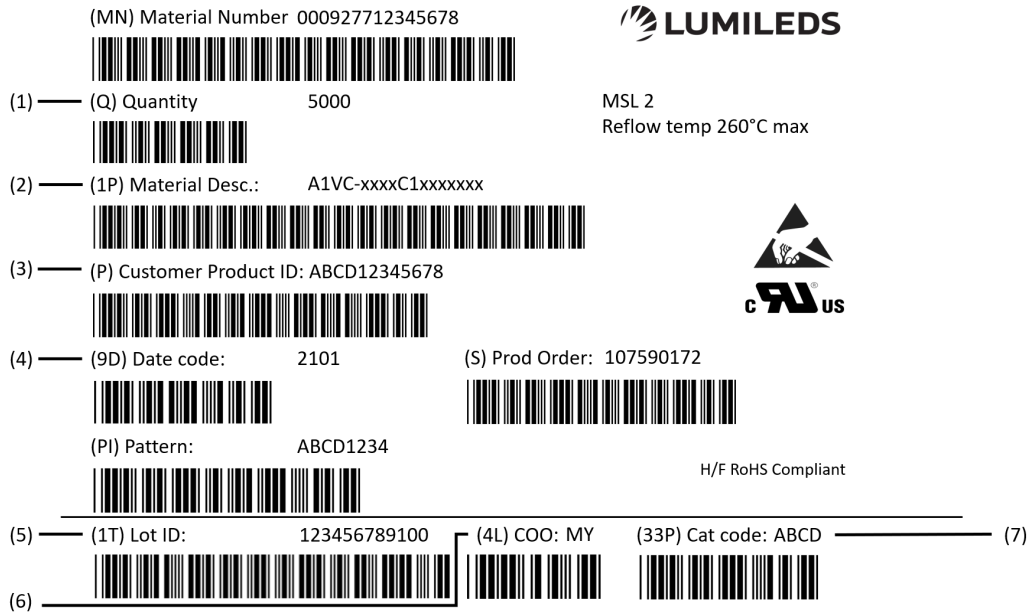


Figure 12. Example of a reel label LUXEON Versat 3030 ST 200

Notes for Figure 12 – Reel label descriptions for customer use:
Field labels not described are for Lumileds internal use only.

1. Total number of LED emitters in a shipment box.
2. Lumileds part number
3. Customer part number for custom requests only.
4. LED test date in YYWW format.
5. Unique product lot identification number. This number is required for traceability purposes.
6. Country code of origin of manufacturing of part (e.g. MY for Malaysia, CN for China) according to ISO 3166-1 alpha-2 document.
7. Product bin 4-digit alphanumeric CAT code.

About Lumileds

Companies developing automotive, mobile, IoT and illumination lighting applications need a partner who can collaborate with them to push the boundaries of light. With over 100 years of inventions and industry firsts, Lumileds is a global lighting solutions company that helps customers around the world deliver differentiated solutions to gain and maintain a competitive edge. As the inventor of Xenon technology, a pioneer in halogen lighting and the leader in high performance LEDs, Lumileds builds innovation, quality and reliability into its technology, products and every customer engagement. Together with its customers, Lumileds is making the world safer, better and more beautiful—with light.

To learn more about our lighting solutions, visit lumileds.com.



©2023 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.
lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.