



LUXEON 3014

High efficacy compact package,
designed for high quality light output



LUXEON 3014 has a compact package size of 3.0mm x 1.4mm x 0.70mm—ideal for achieving uniform light output where space is limited, such as linear applications, tube lighting, and signage. LUXEON 3014 is hot-color targeted at a junction temperature of 65°C, ensuring color consistency and meeting ANSI standards at operating conditions.

FEATURES AND BENEFITS

Compact package design affirms uniformity and reduction in spottiness

Hot-color targeting ensures better color control

1/9th ANSI micro-color binning enables tight color control

120mA maximum driving current allows outstanding brightness

PRIMARY APPLICATIONS

Wall Grazer

Linear

Wall Wash

Sconce

Downlights


LUXEON 3014 product performance at 60mA and 30mA at test temperature

NOMINAL CCT ^[1]	MINIMUM CRI ^[2, 3]	LUMINOUS FLUX ^[3] (lm)		TYPICAL LUMINOUS EFFICACY (lm/W)	TYPICAL LUMINOUS FLUX ^[2] (lm)	TYPICAL LUMINOUS EFFICACY (lm/W)	PART NUMBER
		MINIMUM	TYPICAL				
		60mA				30mA	
8000K	70	25.0	30.4	172	16.1	190	L130-8070001400001
10000K	70	23.0	29.8	168	15.8	186	L130-1070001400001
2200K	80	19.0	24.9	141	13.2	155	L130-2280HE1400001
2500K	80	21.0	26.8	151	14.2	167	L130-2580HE1400001
2700K	80	23.0	28.0	158	14.8	175	L130-2780HE1400001
3000K	80	23.0	28.9	163	15.3	180	L130-3080HE1400001
3500K	80	23.0	29.9	169	15.8	187	L130-3580HE1400001
4000K	80	25.0	30.4	172	16.1	190	L130-4080HE1400001
5000K	80	25.0	30.9	175	16.4	193	L130-5080HE1400001
5700K	80	25.0	30.5	172	16.2	190	L130-5780HE1400001
6500K	80	25.0	29.8	168	15.8	186	L130-6580HE1400001
2200K	90	16.0	20.3	115	10.7	126	L130-2290001400001
2500K	90	16.0	22.5	127	11.9	140	L130-2590001400001
2700K	90	18.0	23.2	131	12.2	144	L130-2790001400001
3000K	90	19.0	24.3	137	12.8	151	L130-3090001400001
3500K	90	19.0	25.4	144	13.4	158	L130-3590001400001
4000K	90	20.0	26.3	149	13.9	163	L130-4090001400001
5000K	90	20.0	26.2	148	13.8	163	L130-5090001400001
5700K	90	20.0	26.0	147	13.7	161	L130-5790001400001
6500K	90	20.0	26.0	147	13.7	161	L130-6590001400001
2200K	95	15.5	20.1	114	10.7	126	L130-2295001400001
2500K	95	18.0	20.7	117	11.0	130	L130-2595001400001
2700K	95	18.0	20.7	117	11.0	130	L130-2795001400001
3000K	95	20.0	22.6	128	12.0	142	L130-3095001400001
3500K	95	20.0	23.9	135	12.7	150	L130-3595001400001
4000K	95	19.5	23.9	135	12.7	150	L130-4095001400001
5000K	95	19.5	23.7	134	12.6	149	L130-5095001400001
5700K	95	19.5	23.7	134	12.6	148	L130-5795001400001

Notes:

1. Correlated color temperature is hot targeted at T₁=65°C.
2. Lumileds maintains a tolerance of ±2 on CRI and ±6.5% on luminous flux measurements.
3. Typical CRI is approximately 2 points higher than the minimum CRI specified, but this is not guaranteed.
4. For 90CRI products, R9≥50.

Mechanical Dimensions

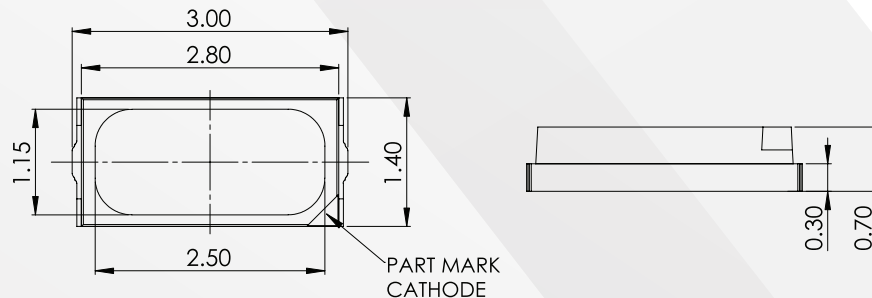

Notes:

1. Drawings are not scale.
2. All dimensions are in millimeters.

©2025 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.

lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at lumileds.com/patents.